

## 4" Bathroom and Toilet Fans



AVF4010

- Wall or ceiling mounting
- 85m<sup>3</sup>/hour extract rate
- 2 year guarantee
- Full range of accessories

Code	Description
AVF4010	For remote switching
AVF4020	Integral adjustable electric timer
AVF4030	With pull cord switch
AVF4040	Humidity control and timer

## 4" Centrifugal Fans



- For use in bathrooms and toilets
- Designed to move air long distances
- 90m<sup>3</sup>/hour extract rate

Code	Description
AVF4020C	Centrifugal with timer (1-20 mins)

## 4" Shower Fan



- In-line remotely mounted extractor fan
- 85m<sup>3</sup>/hour extract rate

Code	Description
AVF4321	Shower fan with timer (1-20 mins)

## Low Voltage Fans and Transformers



AVFLVF



AVFLVTH


- Wall or ceiling mounted SELV fan
- Suitable for mounting within the splash area of a shower or bath

Code	Description
AVFLVF	Low voltage standard fan 12V
AVFLVTH	Transformer 12V humidistat
AVFLVTS	Transformer 12V standard
AVFLVTT	Transformer 12V timer
AVFLVTP	Transformer 12V pull cord

## 4" Accessories



AVF4003W



AVF4005B

Code	Description
<b>FIXED WALL GRILLE</b>	
AVF4003B	Brown 100mm spigot
AVF4003W	White 100mm spigot
<b>GRAVITY SHUTTER</b>	
AVF4005B	Brown 100mm spigot
AVF4005W	White 100mm spigot
<b>WINDOW CONVERSION KIT</b>	
AVF4007	Window vent kit
<b>FLEXIBLE PVC DUCTING</b>	
AVF4D30	100mm x 3 metres
AVF4D60	100mm x 6 metres
AVF4D150	100mm x 15 metres



## 6" Kitchen Fans



AVF6010

- Wall, ceiling or window mounting
- Suitable for larger bathrooms, utility rooms, shops, offices and restaurants
- 230m<sup>3</sup>/hour extract rate
- 2 year guarantee
- Full range of accessories

Code	Description
<b>AVF6010</b>	For remote switching
<b>AVF6020</b>	Integral adjustable electronic timer
<b>AVF6030</b>	With pull cord switch
<b>AVF6040</b>	Humidity control and timer

## 6" Accessories



AVF6003W



AVF6005W

Code	Description
<b>FIXED WALL GRILLE</b>	
<b>AVF6003W</b>	White 150mm spigot
<b>GRAVITY SHUTTER</b>	
<b>AVF6005W</b>	White 150mm spigot
<b>WINDOW CONVERSION KIT</b>	
<b>AVF6007</b>	Window vent kit

## 6" Automatic Extractor Fans



AVF6A



AVFVSC

- Wall or window mounting
- 278m<sup>3</sup>/hour extract rate
- Suitable for a variety of commercial applications
- 2 year guarantee
- Fitted with thermo-activated internal backdraught shutters
- BEAB approval

Code	Description
<b>AVF6A</b>	6" fan unit
<b>AVF6AK</b>	6" fan unit and kit
<b>AVFVSC</b>	Speed controller intake/extract with neon

## Showerlite Fan Kit with Timer



- In-line axial extractor fan incorporated into a circular diffuser
- Suitable for showers and bathrooms
- Kit includes timer, fan light, transformer and all fixing accessories

Code	Description
<b>AVFSLKTC</b>	Chrome kit with timer
<b>AVFSLKTW</b>	White kit with timer

## Desk Fans



AVFD9 WHI



AVFD12 CHR

- Fixed or oscillating positions
- Upward and downward tilt

Code	Description
<b>WHITE</b>	
AVFD9 WHI	9" 2 speed desk/wall mounting
AVFD12 WHI	12" 3 speed desk/wall mounting
AVFD16 WHI	16" 3 speed desk/wall mounting
<b>CHROME</b>	
AVFD12 CHR	12" 3 speed desk/wall mounting

## Pedestal Fans




AVFP16 WHI

- Fixed or oscillating positions
- Adjustable height
- Upward and downward tilt

Code	Description
AVFP16 WHI	16" 3 speed white

## Low Profile Ducting

**NEW**

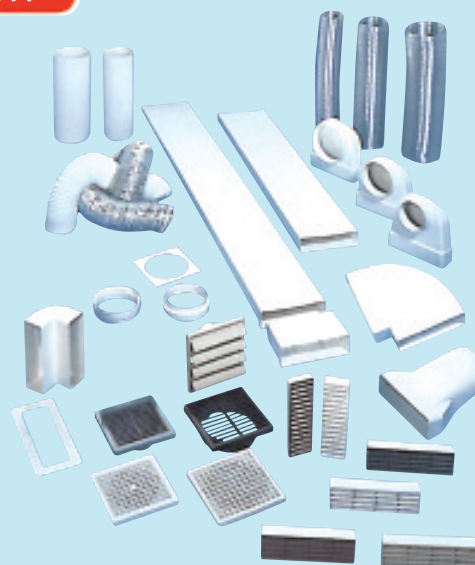

- 110mm x 54mm low profile ducting
- Multi-fit grilles can be connected to round or rectangular ducting
- Multi-fit grilles are available in brown (B) or white (W)

Code	Description
<b>FLAT DUCTING</b>	
AVDU40100	1000mm length
AVDU40150	1500mm length
<b>ROUND PIPES</b>	
AVDU41350	100mm diameter 350mm long
AVDU41500	100mm diameter 500mm long
AVDU41900	100mm diameter 1000mm long
<b>ACCESSORIES</b>	
AVDU41010	Wall outlet
AVDU41030	Cowled wall outlet
AVDU41050	Louvred vent
AVDU1146	Egg crate grille
AVDU41450	Internal door ventilator
AVDU40200	Flat channel connector
AVDU40300	Elbow connection 90 degrees
AVDU40400	Elbow bend 90 degrees
AVDU40500	Horizontal bend 90 degrees
AVDU40600	Vertical bend 90 degrees
AVDU40700	Short round to rectangular adaptor - female
AVDU40710	Short round to rectangular adaptor - male
AVDU41140	Round wall plate
AVDU41150	Rectangular wall plate
AVDU41220	Flat channel clip
AVDU4124M	Threaded hose connector male
AVDU4126F	Threaded hose connector female
AVDU414C	Round pipe connector 100mm
AVDU40770	Airbrick adaptor
AVDU45010	Slimline airbrick horizontal louvre
AVDU45011	Slimline airbrick vertical louvre
<b>MULTI-FIT GRILLES</b>	
AVDU41051	Fixed louvre
AVDU41011	Gravity shutter
AVDU41031	Cowled wall outlet
AVDU41052	Egg crate louvre

## Portable Air Conditioners

- 4 functions - cooler, fan, dehumidifier and heater
- Cooling capacity 12,000 BTU (3500W)
- 17°C to 30°C temperature setting
- 24 hour timer
- 3 speed fan settings
- Castors for easy mobility
- CFC free refrigerant (R407C)
- Suitable for room sizes with floor area up to 30m<sup>2</sup>
- 3.50kW heating capacity



Code	Description
AVAIRCON12	12,000 BTU 4 in 1 function